




Δρ. Άννα Κεφάλα

WireShark

(a network protocol analyser)

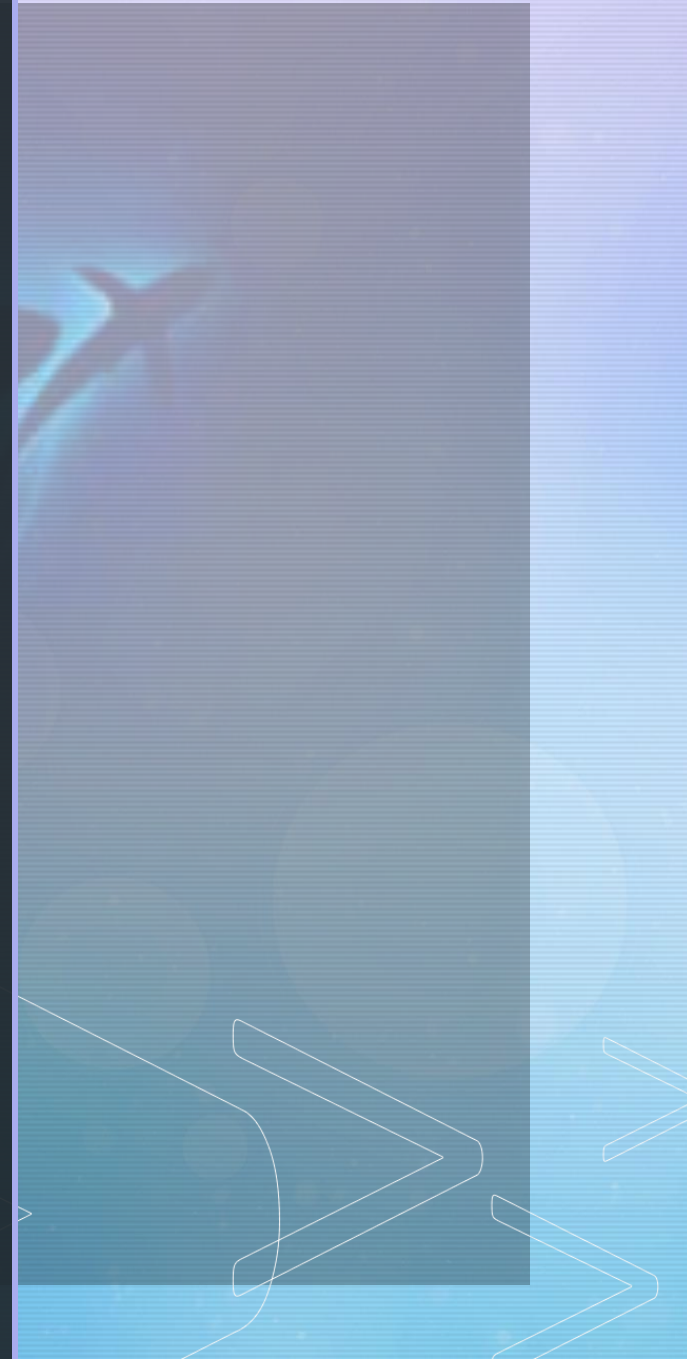

WireShark

About Packet Sniffing



■ Κατανόηση Δικτυακών Πρωτοκόλλων

- Παρατήρηση ακολουθίας ανταλλασσόμενων μηνυμάτων
- Λεπτομέρειες λειτουργίας πρωτοκόλλων
- Δύο δυνατότητες
 - Προσομοίωση λειτουργίας δικτύου
 - «Παρακολούθηση» πραγματικής λειτουργίας δικτύου



Τί είναι Packet Sniffer?


Packet analyzer, network analyzer, protocol analyzer ή packet sniffer

- captures (αιχμαλωτίζει) τα δικτυακά μηνύματα (πακέτα) υποκλοπή και καταγραφή κίνησης
- καθώς οι ροές επικοινωνίας δεδομένων κινούνται στο δίκτυο, ο sniffer αιχμαλωτίζει (**captures**) τα πακέτα, αποκωδικοποιεί (**decodes**) τα ανεπεξέργαστα δεδομένα (πεδία πρωτοκόλλων πακέτου) και τα αναλύει (**analyzes**) σύμφωνα με RFC ή άλλα specifications

Τί είναι Packet Sniffer? (συν.)

- Passive, μόνο λαμβάνει αντίγραφα των πακέτων
 - η επεξεργασία των πακέτων συνεχίζεται κανονικά
- Αποτελείται από δύο μέρη:
 - **Packet Capture Library**: όλα τα πρωτόκολλα ενσωματώνονται στο πλαίσιο (frame) του επιπέδου σύνδεσης (π.χ. Ethernet)
 - **Packet Analyzer**: headers από Ethernet frame, IP datagram, TCP/UDP segment, application message

Packet Sniffer Structure

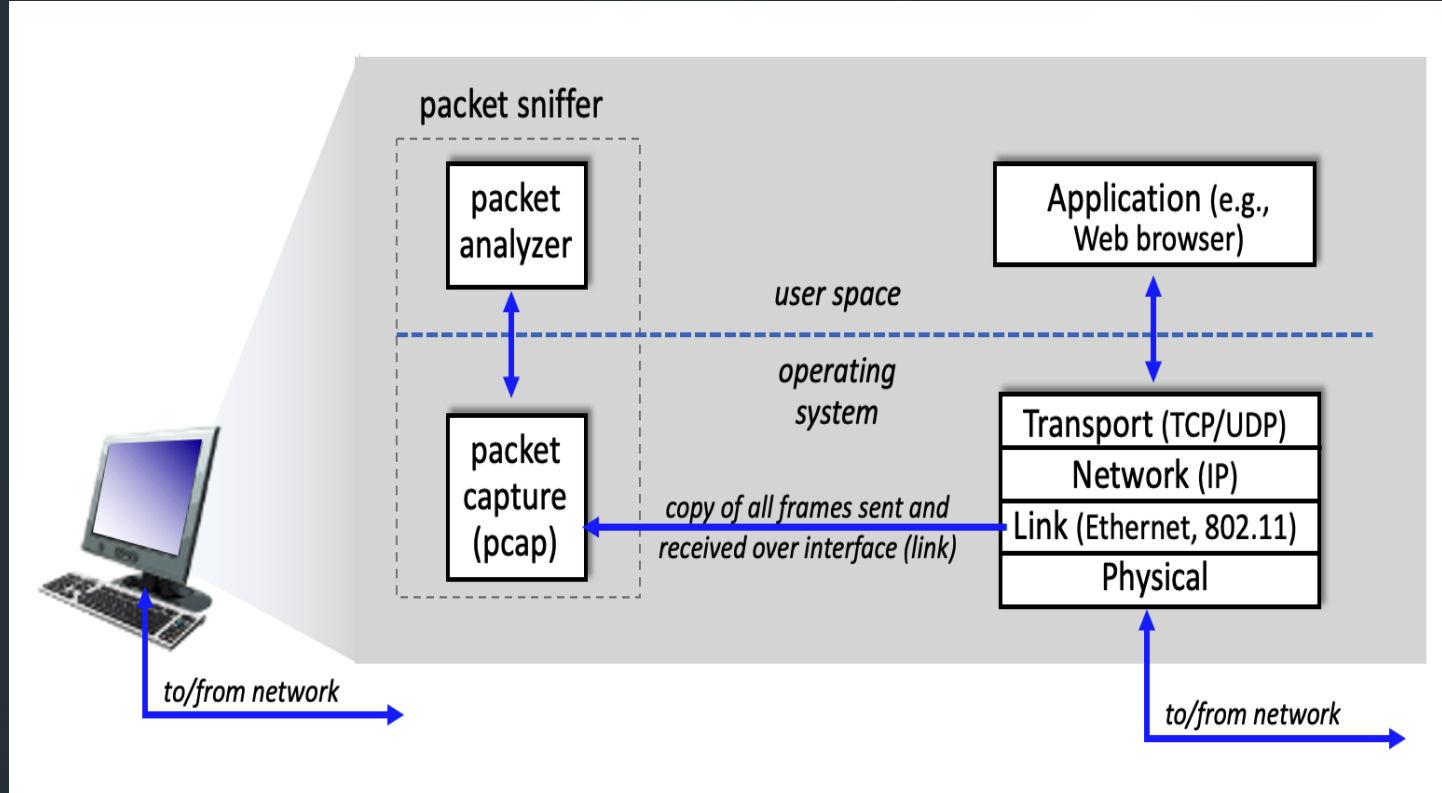

Application
Message

TCP/UDP Segment

IP Datagram

Ethernet Frame

Frame

- Ενσωματώνει τα *headers* από όλα τα πιο πάνω επίπεδα

- Application
 - application protocol, π.χ. http, DNS, IMAP
- Transport
 - protocol, π.χ. TCP, UDP
 - port number: 16-bit ακέραιος, 0-1024 χρησιμοποιούνται για well-known services, δεσμευμένα από το λειτουργικό
- Network
 - protocol, π.χ. IP
 - IP address: 32-bit (IPv4) ή 128-bits (IPv6), μοναδικός αριθμός σύνδεσης του network interface της συσκευής στο Internet.
- Link
 - MAC (ethernet) address: 48-bit HEX αριθμός προσδιορίζει μοναδικά το interface σύνδεσης στο τοπικό δίκτυο (από τον κατασκευαστή του interface)



WireShark

➤ WireShark: Network Protocol Analyzer

- Κάνει capture και εμφανίζει αλληλεπιδραστικά την κίνηση στο δίκτυο σε πραγματικό χρόνο
- Δεν αποκωδικοποιεί μόνο τα bits & bytes αλλά και τις συσχετίσεις μεταξύ πακέτων και πρωτοκόλλων και την αλληλουχία μηνυμάτων των πρωτοκόλλων
- Τρέχει σε Windows, MacOS, Linux, Unix
- Open source, GNU General Public License Ver. 2
- Ξεκίνησε και έγινε γνωστό ως Ethereal

WireShark Packet Sniffer

<http://www.wireshark.org/>

Γιατί αυτό το εργαλείο;

- Stable
- Μεγάλη βάση χρηστών
- Καλή τεκμηρίωση
- Πλούσια λειτουργικότητα (αναλύει εκατοντάδες πρωτόκολλα)
- Καλή σχεδίαση του user interface

Installing

- <https://www.wireshark.org/download.html>
- Documentation
 - <https://www.wireshark.org/docs/>
- User's guide
 - https://www.wireshark.org/docs/wsug_html_chunked/

Stable Release: 4.6.0

-  Windows x64 Installer
-  Windows Arm64 Installer
-  Windows x64 PortableApps®
-  macOS Universal Disk Image
-  Ubuntu
-  Source Code

Υποστηριζόμενα Πρωτόκολλα

- Οργανώνει τα πρωτόκολλα βάση της ιεραρχίας με την οποία εμφανίζονται στο trace
- Εκατοντάδες τα υποστηριζόμενα πρωτόκολλα (π.χ. tcp), πεδία πρωτοκόλλων (π.χ. tcp.port) και μέσα

Υποστηριζόμενες συσκευές/διεπαφές

- Φυσικές διεπαφές
 - Ethernet, serial (PPP), 802.11 (WiFi) wireless LANs, Bluetooth, IrDA, USB
- Εικονικές διεπαφές
 - Loopback
 - VLANs


Μπορώ να δω όλη την κίνηση?

- Μόνο πακέτα από ή προς το μηχανήμά μου
- Η unicast κίνηση δεν στέλνεται παντού σε ένα switched network
- Broadcast και multicast κίνηση

Wireshark Specifics

Αρχική οθόνη

- Click σε ένα interface για επιλογή →  start packet capture
- Menu *Capture*, *Stop* ή  → σταματάει το packet capture

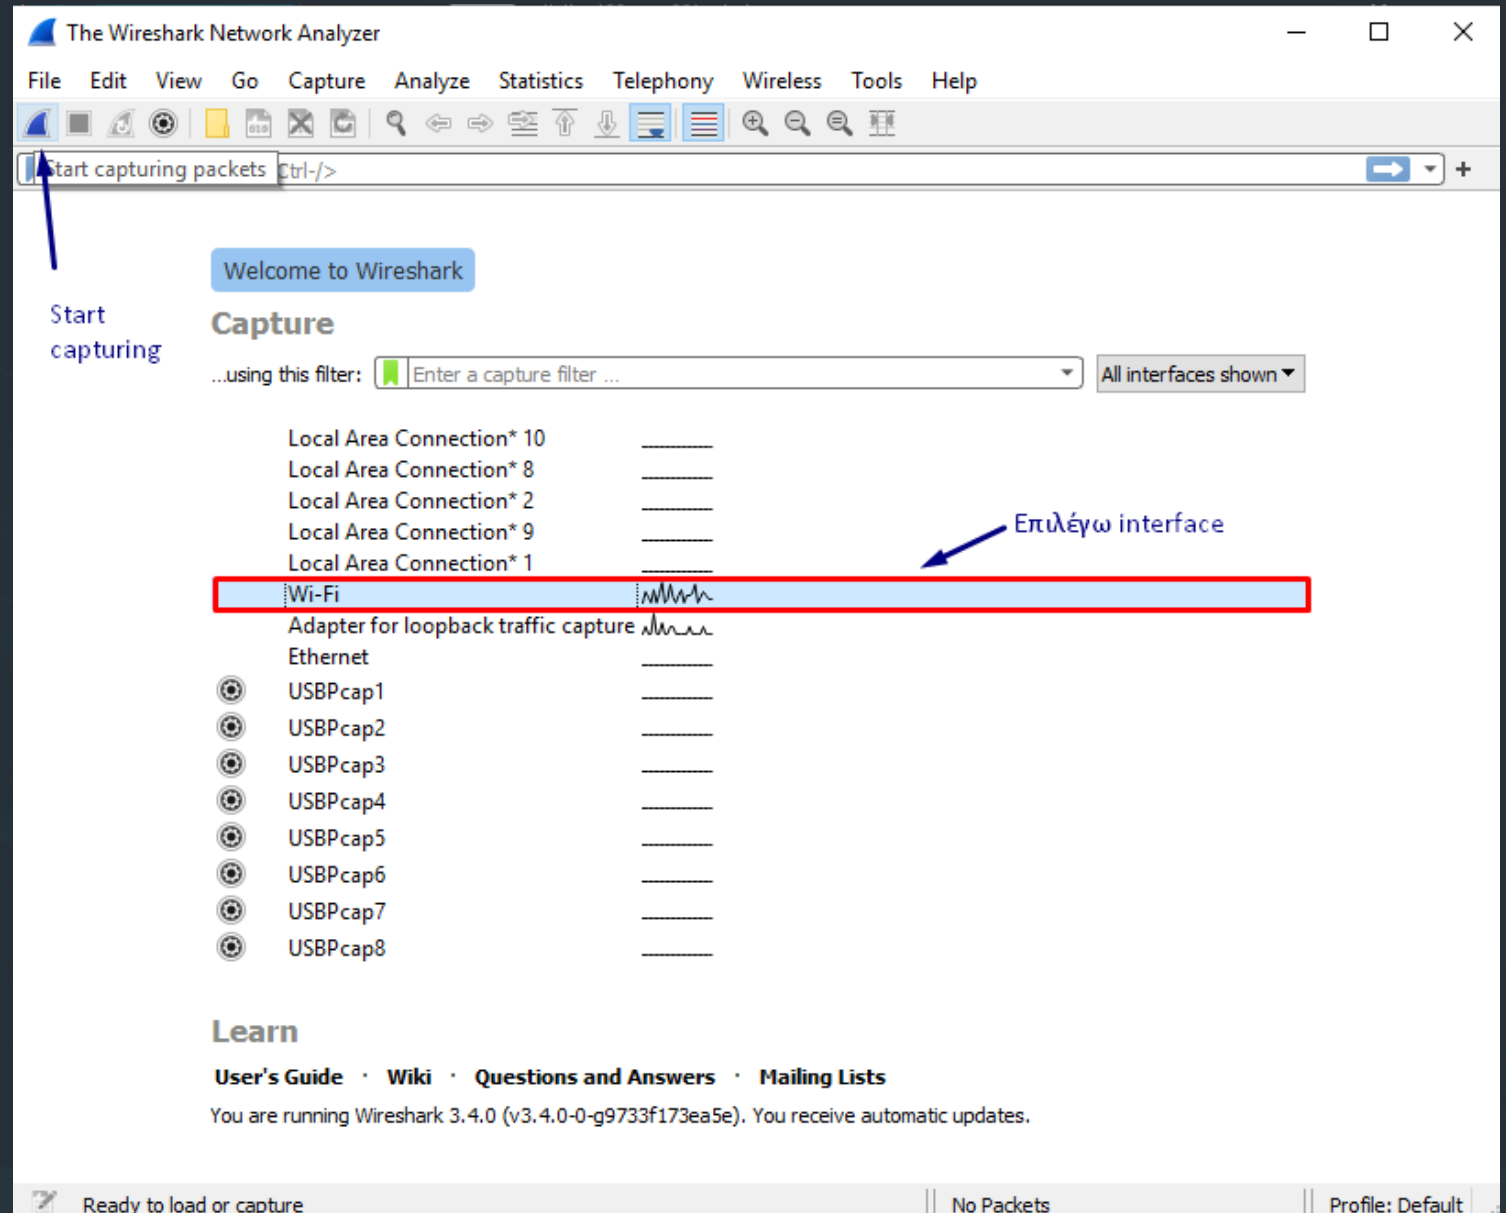

menus εντολών

προσδιορισμός φίλτρου

λίστα με captured
πακέτα

λεπτομέρειες
επικεφαλίδων
επιλεγμένου
πακέτου

δεδομένα πακέτου
σε HEX και ASCII
μορφή

The image shows the Wireshark network protocol analyzer interface. The main window is titled '*Wi-Fi'. The menu bar includes File, Edit, View, Go, Capture, Analyze, Statistics, Telephony, Wireless, Tools, and Help. The toolbar contains various icons for file operations, capture, analysis, and display. Below the toolbar is a display filter bar with the text 'Apply a display filter ... <Ctrl-/>'. The packet list pane shows a table of captured packets:

No.	Time	Source	Destination	Protocol	Length	Info
268	7.507364	108.177.15.189	192.168.1.2	UDP	70	443 → 63888 Len=28
269	7.509607	52.114.132.23	192.168.1.2	TCP	54	443 → 59797 [ACK] Seq=6349 Ack
270	7.514054	192.168.1.2	74.125.133.189	UDP	75	52257 → 443 Len=33
271	7.532082	52.114.132.23	192.168.1.2	TLSv1.2	481	Application Data
272	7.532189	192.168.1.2	52.114.132.23	TCP	54	59797 → 443 [ACK] Seq=5087 Ack
273	7.622222	74.125.133.189	192.168.1.2	UDP	70	443 → 52257 Len=28
274	7.709055	192.168.1.2	108.177.15.189	UDP	75	63888 → 443 Len=33
275	7.824100	192.168.1.2	74.125.133.189	UDP	75	52257 → 443 Len=33

The details pane for the selected packet (No. 275) shows the following information:

- Frame 1: 75 bytes on wire (600 bits), 75 bytes captured (600 bits) on interface \Device\NPF_{0FADE74D-17BC-4747-E}
- Ethernet II, Src: Tp-LinkT_19:1c:51 (98:de:d0:19:1c:51), Dst: AskeyCom_44:3a:91 (00:21:63:44:3a:91)
- Internet Protocol Version 4, Src: 192.168.1.2, Dst: 172.217.169.142
- User Datagram Protocol, Src Port: 50377, Dst Port: 443
- Data (33 bytes)

The packet bytes pane shows the raw data in hexadecimal and ASCII format:

```

0000  00 21 63 44 3a 91 98 de d0 19 1c 51 08 00 45 00  ·!cD:··· ··Q··E·
0010  00 3d 1f 9a 40 00 80 11 c3 03 c0 a8 01 02 ac d9  ····@··· ······
0020  a9 8e c4 c9 01 bb 00 29 38 e3 42 c1 68 43 07 68  ······) 8·B·hC·h
0030  e0 2a b0 56 8f 2c fd 81 e1 8f 17 87 c9 17 cd eb  ·*·V·,·· ······
0040  46 dd 5c 6a e0 1a 34 a4 bb 63 15                F·\j··4· ·c·
  
```

The status bar at the bottom indicates 'wireshark_Wi-FiKQYVT0.pcapng', 'Packets: 282 · Displayed: 282 (100.0%)', and 'Profile: Default'.

menus εντολών

προσδιορισμός φίλτρου

λίστα με captured
πακέτα

λεπτομέρειες
επικεφαλίδων
επιλεγμένου
πακέτου

δεδομένα πακέτου
σε HEX και ASCII
μορφή

The image shows the Wireshark network protocol analyzer interface. The top menu bar includes File, Edit, View, Go, Capture, Analyze, Statistics, Telephony, Wireless, Tools, and Help. Below the menu is a toolbar with various icons for file operations, capture, and analysis. A display filter bar shows 'Apply a display filter ... <Ctrl-/>'. The main packet list pane displays a table of captured packets with columns for No., Time, Source, Destination, Protocol, Length, and Info. The selected packet (No. 56) is highlighted in grey. The details pane on the right shows the structure of the selected packet, including Ethernet II, Internet Protocol Version 4, User Datagram Protocol, and Data (77 bytes). The Data field is expanded, showing the packet payload in both hexadecimal and ASCII formats.

No.	Time	Source	Destination	Protocol	Length	Info
46	1.287948	192.168.9.29	175.12.160.11	TCP	60	63019 → 52909 [PSH, ACK] Seq=1 Ack=1 Win=517 Len=6
47	1.287967	192.168.9.29	81.83.210.177	TCP	60	63017 → 16881 [PSH, ACK] Seq=1 Ack=1 Win=513 Len=6
48	1.287966	192.168.9.29	176.212.185.184	BitTor...	71	Continuation data
49	1.287982	192.168.9.29	81.185.26.30	TCP	60	63021 → 14043 [PSH, ACK] Seq=1 Ack=1 Win=64240 Len=6
50	1.288044	192.168.9.29	135.125.233.219	BitTor...	60	Continuation data
51	1.324826	45.66.185.228	192.168.9.29	BT-DHT	146	Get_peers Info_hash=1e3c459dc9869e7b6926fbad5b038ea0c9e2cf1f
52	1.325235	192.168.9.29	45.66.185.228	BT-DHT	352	Response Nodes=8
53	1.350431	81.83.210.177	192.168.9.29	TCP	60	16881 → 63017 [ACK] Seq=1 Ack=7 Win=229 Len=0
54	1.356700	176.212.185.184	192.168.9.29	TCP	60	6881 → 63018 [ACK] Seq=1 Ack=18 Win=166 Len=0
55	1.366827	135.125.233.219	192.168.9.29	TCP	60	6881 → 63022 [ACK] Seq=1 Ack=7 Win=115 Len=0
56	1.435503	176.212.185.184	192.168.9.29	TCP	60	6881 → 63018 [FIN, ACK] Seq=1 Ack=18 Win=166 Len=0
57	1.435565	192.168.9.29	176.212.185.184	TCP	54	63018 → 6881 [ACK] Seq=18 Ack=2 Win=516 Len=0
58	1.435642	192.168.9.29	176.212.185.184	TCP	54	63018 → 6881 [FIN, ACK] Seq=18 Ack=2 Win=516 Len=0
59	1.481936	HewlettPacka_0c:74:...	All-FCF-MACs	FIP	60	VLAN Request
60	1.504148	176.212.185.184	192.168.9.29	TCP	60	6881 → 63018 [ACK] Seq=2 Ack=19 Win=166 Len=0
61	1.534701	156.146.60.136	192.168.9.29	BT-DHT	146	Get_peers Info_hash=ce57009ec79a2a388349f77eb97d7503506a7fe4

Frame 91: 119 bytes on wire (952 bits), 119 bytes captured (952 bits) on interface \Device\NPF_{343BB1...}

Ethernet II, Src: Fortinet_09:0f:12 (00:09:0f:09:0f:12), Dst: FujitsuTechn_05:cf:f6 (90:1b:0e:05:cf:f6)

Internet Protocol Version 4, Src: 216.58.205.42, Dst: 192.168.9.29

User Datagram Protocol, Src Port: 443, Dst Port: 61546

Data (77 bytes)

```

0000  90 1b 0e 05 cf f6 00 09 0f 09 0f 12
0010  00 69 00 00 40 00 3a 11 d0 b5 d8 3a
0020  09 1d 01 bb f0 6a 00 55 a1 6d 4c 7a
0030  4c 4c 90 2d ea cb 1a db 5f db d5 1f
0040  c8 d9 4f f8 60 9f cf f7 b1 38 2e 42
0050  09 2c e5 69 61 b3 af 3d 44 8e e3 17
0060  7b 22 53 0f 51 e1 d8 de 16 c9 6a a7
0070  6d a7 df 94 f2 02 7a
  
```

Packet Listing

- Packet number (σειρά με την οποία γίνεται το capturing)
- Time elapsed (ο χρόνος που έχει περάσει από την αρχή της ανίχνευσης)
- Source/destination addresses (IP ή Ethernet)
- Protocol type (top level: TCP, UDP, http, ssl, ...)
- Length
- Protocol-specific information

διαφορετικά
πρωτόκολλα
ενσωματώνονται
μέσα σε ένα πακέτο



The screenshot shows the Wireshark interface with the following components:

- Packet List:** A table showing captured packets. Packet 275 is selected.

No.	Time	Source	Destination	Protocol	Length	Info
268	7.507364	108.177.15.189	192.168.1.2	UDP	70	443 → 63888 Len=28
269	7.509607	52.114.132.23	192.168.1.2	TCP	54	443 → 59797 [ACK] Seq=6349 Ack
270	7.514054	192.168.1.2	74.125.133.189	UDP	75	52257 → 443 Len=33
271	7.532082	52.114.132.23	192.168.1.2	TLSv1.2	481	Application Data
272	7.532189	192.168.1.2	52.114.132.23	TCP	54	59797 → 443 [ACK] Seq=5087 Ack
273	7.622222	74.125.133.189	192.168.1.2	UDP	70	443 → 52257 Len=28
274	7.709055	192.168.1.2	108.177.15.189	UDP	75	63888 → 443 Len=33
275	7.824100	192.168.1.2	74.125.133.189	UDP	75	52257 → 443 Len=33
- Packet Details:** Shows the hierarchical structure of the selected packet (Frame 1).
 - Frame 1: 75 bytes on wire (600 bits), 75 bytes captured (600 bits) on interface \Device\NPF_{0FADE74D-17BC-4747-E...}
 - Ethernet II, Src: Tp-LinkT_19:1c:51 (98:de:d0:19:1c:51), Dst: AskeyCom_44:3a:91 (00:21:63:44:3a:91)
 - Internet Protocol Version 4, Src: 192.168.1.2, Dst: 172.217.169.142
 - User Datagram Protocol, Src Port: 50377, Dst Port: 443
 - Data (33 bytes)
- Packet Bytes:** Displays the raw data in hexadecimal and ASCII.


```

0000  00 21 63 44 3a 91 98 de d0 19 1c 51 08 00 45 00  ·!cD:··· ··Q··E·
0010  00 3d 1f 9a 40 00 80 11 c3 03 c0 a8 01 02 ac d9  ···@··· ······
0020  a9 8e c4 c9 01 bb 00 29 38 e3 42 c1 68 43 07 68  ······) 8·B·hC·h
0030  e0 2a b0 56 8f 2c fd 81 e1 8f 17 87 c9 17 cd eb  ·*·V·,··· ······
0040  46 dd 5c 6a e0 1a 34 a4 bb 63 15                F·\j···4· ·c·
      
```

The status bar at the bottom indicates: wireshark_Wi-FiKQYVT0.pcapng | Packets: 282 · Displayed: 282 (100.0%) | Profile: Default

Packet-fields/headers details (για επιλεγμένο πακέτο)

- Ethernet frame (επίπεδο σύνδεσης δεδομένων)
- IP datagram (επίπεδο δικτύου)
- TCP/UDP segment (επίπεδο μεταφοράς)
- Upper layer protocol (επίπεδο εφαρμογής)

The image shows a Wireshark packet capture window titled '*Wi-Fi'. The main pane displays a list of captured packets. Packet 271 is selected, showing it is a TLSv1.2 frame of 481 bytes. The packet list table is as follows:

No.	Time	Source	Destination	Protocol	Length	Info
7	0.251463	172.217.169.142	192.168.1.2	UDP	1392	443 → 50377 Len=1350
6	0.148978	192.168.1.2	108.177.15.189	UDP	75	63888 → 443 Len=33
5	0.146053	192.168.1.2	74.125.133.189	UDP	75	52257 → 443 Len=33
4	0.066345	172.217.169.142	192.168.1.2	UDP	67	443 → 50377 Len=25
3	0.008949	192.168.1.2	172.217.169.142	UDP	257	50377 → 443 Len=215
2	0.008645	192.168.1.2	172.217.169.142	UDP	348	50377 → 443 Len=306
1	0.000000	192.168.1.2	172.217.169.142	UDP	75	50377 → 443 Len=33
271	7.532082	52.114.132.23	192.168.1.2	TLSv1.2	481	Application Data

The packet details pane for Frame 271 shows the following information:

- Frame 271: 481 bytes on wire (3848 bits), 481 bytes captured (3848 bits) on interface \Device\NPF_{0FADE74D-17BC-4747-B885-EEDFDC1F3603}
- Interface id: 0 (\Device\NPF_{0FADE74D-17BC-4747-B885-EEDFDC1F3603})
- Encapsulation type: Ethernet (1)
- Arrival Time: Nov 13, 2020 15:19:23.915165000 GTB Standard Time
- [Time shift for this packet: 0.000000000 seconds]
- Epoch Time: 1605273563.915165000 seconds
- [Time delta from previous captured frame: 0.018028000 seconds]
- [Time delta from previous displayed frame: 0.018028000 seconds]
- [Time since reference or first frame: 7.532082000 seconds]
- Frame Number: 271
- Frame Length: 481 bytes (3848 bits)
- Capture Length: 481 bytes (3848 bits)
- [Frame is marked: False]
- [Frame is ignored: False]
- [Protocols in frame: eth:ethertype:ip:tcp:tls]
- [Coloring Rule Name: TCP]
- [Coloring Rule String: tcp]

Ethernet

*Wi-Fi

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
7	0.251463	172.217.169.142	192.168.1.2	UDP	1392	443 → 50377 Len=1350
6	0.148978	192.168.1.2	108.177.15.189	UDP	75	63888 → 443 Len=33
5	0.146053	192.168.1.2	74.125.133.189	UDP	75	52257 → 443 Len=33
4	0.066345	172.217.169.142	192.168.1.2	UDP	67	443 → 50377 Len=25
3	0.008949	192.168.1.2	172.217.169.142	UDP	257	50377 → 443 Len=215
2	0.008645	192.168.1.2	172.217.169.142	UDP	348	50377 → 443 Len=306
1	0.000000	192.168.1.2	172.217.169.142	UDP	75	50377 → 443 Len=33
271	7.532082	52.114.132.23	192.168.1.2	TLSv1.2	481	Application Data

> Frame 271: 481 bytes on wire (3848 bits), 481 bytes captured (3848 bits) on interface \Device\NPF_{0FADE74D-17BC-4747-B885}

▼ Ethernet II, Src: AskeyCom 44:3a:91 (00:21:63:44:3a:91), Dst: Tp-LinkT_19:1c:51 (98:de:d0:19:1c:51)

- > Destination: Tp-LinkT_19:1c:51 (98:de:d0:19:1c:51)
- > Source: AskeyCom_44:3a:91 (00:21:63:44:3a:91)
- Type: IPv4 (0x0800)
- > Internet Protocol Version 4, Src: 52.114.132.23, Dst: 192.168.1.2
- > Transmission Control Protocol, Src Port: 443, Dst Port: 59797, Seq: 6349, Ack: 5087, Len: 427
- > Transport Layer Security

Internet Protocol (ver4)

*Wi-Fi

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
7	0.251463	172.217.169.142	192.168.1.2	UDP	1392	443 → 50377 Len=1350
6	0.148978	192.168.1.2	108.177.15.189	UDP	75	63888 → 443 Len=33
5	0.146053	192.168.1.2	74.125.133.189	UDP	75	52257 → 443 Len=33
4	0.066345	172.217.169.142	192.168.1.2	UDP	67	443 → 50377 Len=25
3	0.008949	192.168.1.2	172.217.169.142	UDP	257	50377 → 443 Len=215
2	0.008645	192.168.1.2	172.217.169.142	UDP	348	50377 → 443 Len=306
1	0.000000	192.168.1.2	172.217.169.142	UDP	75	50377 → 443 Len=33
271	7.532082	52.114.132.23	192.168.1.2	TLSv1.2	481	Application Data

> Frame 271: 481 bytes on wire (3848 bits), 481 bytes captured (3848 bits) on interface \Device\NPF_{0FADE74D-17BC-4747-B8...}

> Ethernet II, Src: AskeyCom_44:3a:91 (00:21:63:44:3a:91), Dst: Tp-LinkT_19:1c:51 (98:de:d0:19:1c:51)

✓ Internet Protocol Version 4, Src: 52.114.132.23, Dst: 192.168.1.2

- 0100 = Version: 4
- 0101 = Header Length: 20 bytes (5)
- > Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
- Total Length: 467
- Identification: 0x50b9 (20665)
- > Flags: 0x40, Don't fragment
- Fragment Offset: 0
- Time to Live: 111
- Protocol: TCP (6)
- Header Checksum: 0x3f38 [validation disabled]
- [Header checksum status: Unverified]
- Source Address: 52.114.132.23
- Destination Address: 192.168.1.2

> Transmission Control Protocol, Src Port: 443, Dst Port: 59797, Seq: 6349, Ack: 5087, Len: 427

Transmission Control Protocol

*Wi-Fi

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
7	0.251463	172.217.169.142	192.168.1.2	UDP	1392	443 → 50377 Len=1350
6	0.148978	192.168.1.2	108.177.15.189	UDP	75	63888 → 443 Len=33
5	0.146053	192.168.1.2	74.125.133.189	UDP	75	52257 → 443 Len=33
4	0.066345	172.217.169.142	192.168.1.2	UDP	67	443 → 50377 Len=25
3	0.008949	192.168.1.2	172.217.169.142	UDP	257	50377 → 443 Len=215

< >

> Frame 271: 481 bytes on wire (3848 bits), 481 bytes captured (3848 bits) on interface \Device\NPF_{0FADE74D-17BC-4747-B881-...}

> Ethernet II, Src: AskeyCom_44:3a:91 (00:21:63:44:3a:91), Dst: Tp-LinkT_19:1c:51 (98:de:d0:19:1c:51)

> Internet Protocol Version 4, Src: 52.114.132.23, Dst: 192.168.1.2

▼ Transmission Control Protocol, Src Port: 443, Dst Port: 59797, Seq: 6349, Ack: 5087, Len: 427

Source Port: 443

Destination Port: 59797

[Stream index: 14]

[TCP Segment Len: 427]

Sequence Number: 6349 (relative sequence number)

Sequence Number (raw): 2605853786

[Next Sequence Number: 6776 (relative sequence number)]

Acknowledgment Number: 5087 (relative ack number)

Acknowledgment number (raw): 746573450

0101 = Header Length: 20 bytes (5)

> Flags: 0x018 (PSH, ACK)

Window: 1023

[Calculated window size: 261888]

[Window size scaling factor: 256]


Checksum: 0x2dc9 [unverified]

[Checksum Status: Unverified]

Urgent Pointer: 0

Filtering packets | while capturing (ποια πακέτα γίνονται captured)

Επιλογή φίλτρου πριν
ξεκινήσουμε το capturing

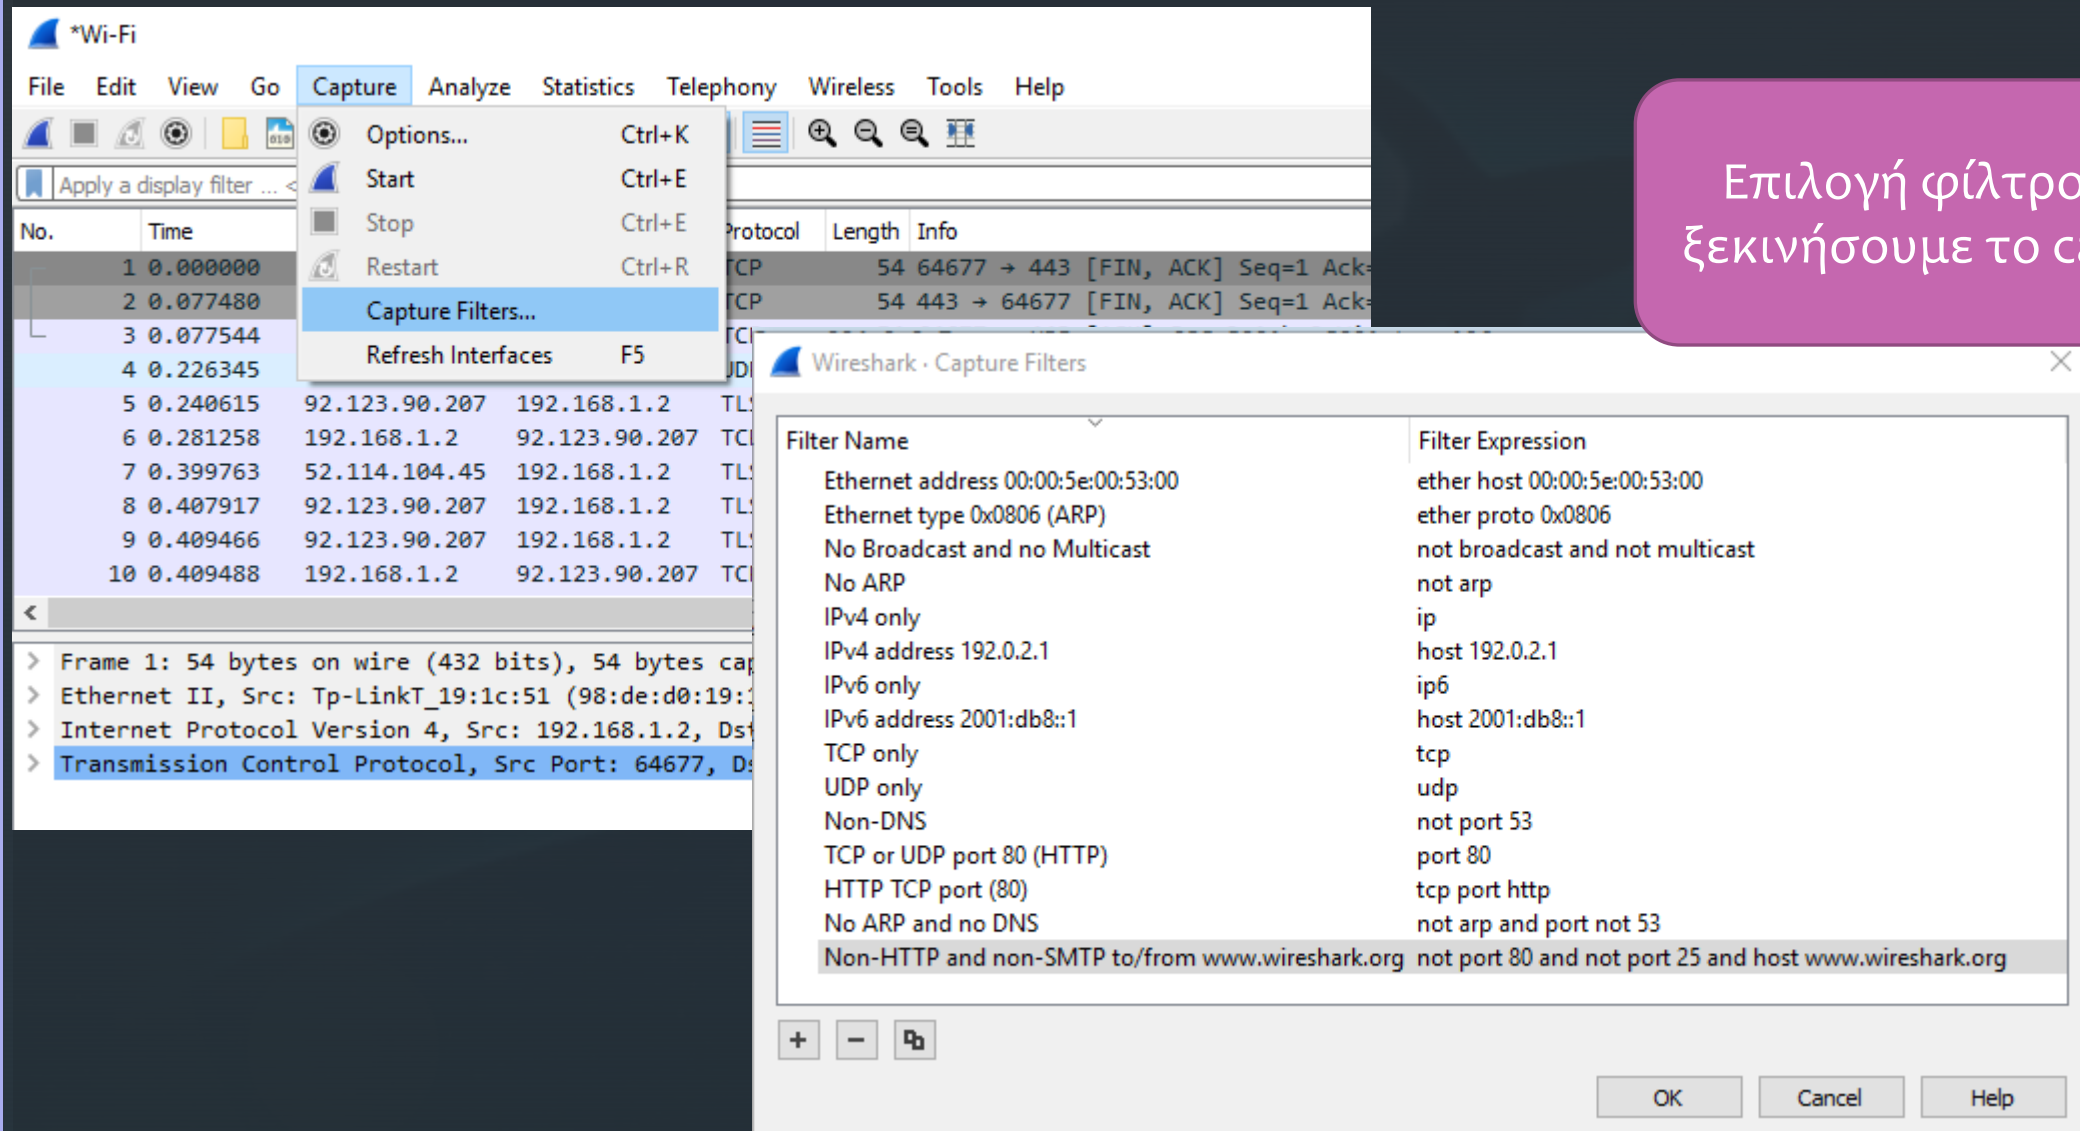

Filtering packets | while analyzing (ποια captured πακέτα εμφανίζονται)

The image shows the Wireshark network protocol analyzer interface. The main window displays a list of captured packets. The 'Analyze' menu is open, and the 'Display Filter Expression...' option is selected. A dialog box titled 'Wireshark · Display Filter Expression' is open, showing the 'Field Name' list on the left and the 'Relation' and 'Value' fields on the right. The 'Field Name' list includes 'IPV4 · Internet Protocol Version 4' and 'ip.addr · Source or Destination Address'. The 'Relation' dropdown is set to '=='. The 'Value' field is set to '192.168.1.2'. The 'Search' field at the bottom contains 'ip', and the resulting filter expression 'ip.addr == 192.168.1.2' is displayed in a green box. A red arrow points from the 'ip.addr' field in the list to the 'ip' in the search field. A blue arrow points from the '192.168.1.2' value in the dialog to the '192.168.1.2' in the filter expression. A green arrow points from the 'ip.addr' field in the list to the 'ip.addr' in the filter expression.

Field Name: all supported protocols headers fields

Filtering packets | while analyzing (εφαρμογή του φίλτρου)

The image shows the Wireshark network protocol analyzer interface. The title bar indicates the capture is on the *Wi-Fi interface. The menu bar includes File, Edit, View, Go, Capture, Analyze, Statistics, Telephony, Wireless, Tools, and Help. The toolbar contains icons for various functions. The filter bar at the top displays the active filter: `ip.addr == 192.168.1.2`, which is highlighted with a red box. To the right of the filter bar, the text "Εφαρμογή φίλτρου" (Filter application) is written in red. Below the filter bar, a list of captured packets is shown. The first packet (No. 1) is selected, and its details are displayed in the bottom pane. The details pane shows the following information:

- Frame 1: 54 bytes on wire (432 bits), 54 bytes captured (432 bits) on interface \Device\NPF_{0FADE74D-17BC-4747-B885-EEDF}
- Ethernet II, Src: Tp-LinkT_19:1c:51 (98:de:d0:19:1c:51), Dst: AskeyCom_44:3a:91 (00:21:63:44:3a:91)
- Internet Protocol Version 4, Src: 192.168.1.2, Dst: 104.146.202.25
- Transmission Control Protocol, Src Port: 64677, Dst Port: 443, Seq: 1, Ack: 1, Len: 0


No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	192.168.1.2	104.146.202.25	TCP	54	64677 → 443 [FIN, ACK] Seq=1 Ack=1 Win=259 Len=0
2	0.077480	104.146.202.25	192.168.1.2	TCP	54	443 → 64677 [FIN, ACK] Seq=1 Ack=2 Win=1028 Len=0
3	0.077544	192.168.1.2	104.146.202.25	TCP	54	64677 → 443 [ACK] Seq=2 Ack=2 Win=259 Len=0
5	0.240615	92.123.90.207	192.168.1.2	TLSv1.2	97	Application Data
6	0.281258	192.168.1.2	92.123.90.207	TCP	54	52307 → 443 [ACK] Seq=1 Ack=44 Win=256 Len=0
7	0.399763	52.114.104.45	192.168.1.2	TLSv1.2	393	Application Data
8	0.407917	92.123.90.207	192.168.1.2	TLSv1.2	104	Application Data
9	0.409466	92.123.90.207	192.168.1.2	TLSv1.2	106	Application Data

Παραδείγματα φίλτρων

- Κίνηση μόνο από/προς την IP διεύθυνση: 104.146.202.25 `ip.host == "104.146.202.25"`
- Κίνηση από/προς ένα εύρος (range) IP διευθύνσεων `ip.addr == 192.168.0.0/16`
- HTTP κίνηση (well known port: 80, tcp) `tcp.port == 80`
- Capturing filters: <https://gitlab.com/wireshark/wireshark/-/wikis/CaptureFilters>
- Displaying filter: <https://gitlab.com/wireshark/wireshark/-/wikis/DisplayFilters>

Τι μπορεί να κάνει το Wireshark

- Ανάλυση της λειτουργίας ενός πρωτοκόλλου
- Απλό παράδειγμα: ποιο είναι το RTT (Round Trip Time) ενός HTTP request?
 - Time του GET message (No 181)
 - Time του response message (No 197)

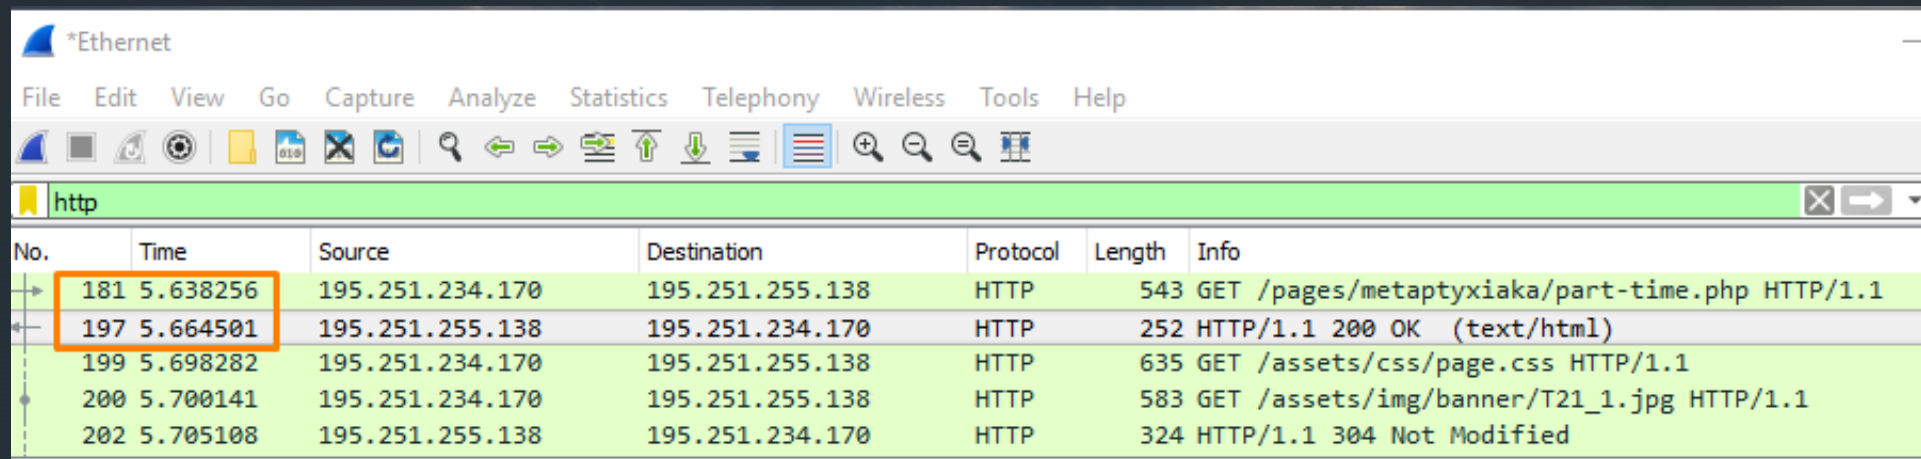

No.	Time	Source	Destination	Protocol	Length	Info
181	5.638256	195.251.234.170	195.251.255.138	HTTP	543	GET /pages/metaptyxiaka/part-time.php HTTP/1.1
197	5.664501	195.251.255.138	195.251.234.170	HTTP	252	HTTP/1.1 200 OK (text/html)
199	5.698282	195.251.234.170	195.251.255.138	HTTP	635	GET /assets/css/page.css HTTP/1.1
200	5.700141	195.251.234.170	195.251.255.138	HTTP	583	GET /assets/img/banner/T21_1.jpg HTTP/1.1
202	5.705108	195.251.255.138	195.251.234.170	HTTP	324	HTTP/1.1 304 Not Modified


TCP 3-way Handshake

*Wi-Fi

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

tcp && ip.addr==83.212.207.19

No.	Time	Source	Destination	Protocol	Length	Info
885	24.863780	192.168.1.2	83.212.207.19	TCP	66	50175 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM=1
892	24.961649	83.212.207.19	192.168.1.2	TCP	66	80 → 50175 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1416 SACK_PERM=1 WS=128
893	24.961762	192.168.1.2	83.212.207.19	TCP	54	50175 → 80 [ACK] Seq=1 Ack=1 Win=66304 Len=0
947	25.840946	192.168.1.2	83.212.207.19	HTTP	465	GET / HTTP/1.1
951	25.943298	83.212.207.19	192.168.1.2	TCP	54	80 → 50175 [ACK] Seq=1 Ack=412 Win=64128 Len=0
980	26.240509	83.212.207.19	192.168.1.2	TCP	1470	80 → 50175 [ACK] Seq=1 Ack=412 Win=64128 Len=1416 [TCP segment of a reassembled
981	26.242260	83.212.207.19	192.168.1.2	TCP	1470	80 → 50175 [ACK] Seq=1417 Ack=412 Win=64128 Len=1416 [TCP segment of a reassembl
982	26.242313	192.168.1.2	83.212.207.19	TCP	54	50175 → 80 [ACK] Seq=412 Ack=2833 Win=66304 Len=0
983	26.244118	83.212.207.19	192.168.1.2	HTTP	1404	HTTP/1.1 200 OK (text/html)
991	26.284207	192.168.1.2	83.212.207.19	TCP	54	50175 → 80 [ACK] Seq=412 Ack=4183 Win=65024 Len=0

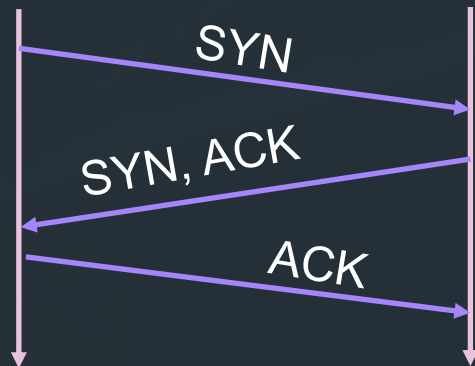

Statistics | Flow Graph

The screenshot displays the Wireshark interface with the Statistics panel open, showing the Flow Graph section. The Flow Graph shows a sequence of TCP flows between 192.168.1.2 and 83.212.207.19.

Statistics Panel - Flow Graph



Time	192.168.1.2	83.212.207.19	Comment
24.863780	50175	80	Seq = 0
24.961649	50175	80	Seq = 0 Ack = 1
24.961762	50175	80	Seq = 1 Ack = 1
25.840946	50175	80	Seq = 1 Ack = 1
25.943298	50175	80	Seq = 1 Ack = 412
26.240509	50175	80	Seq = 1 Ack = 412
26.242260	50175	80	Seq = 1417 Ack = 412
26.242313	50175	80	Seq = 412 Ack = 2833
26.244118	50175	80	Seq = 2833 Ack = 412
26.284207	50175	80	Seq = 412 Ack = 4183
29.472245	50175	80	Seq = 412 Ack = 4183

Packet 1228: Seq = 8431 Ack = 878

Limit to display filter: ☒ Flow type: TCP Flows Addresses: Any

Buttons: Save As... Reset Diagram Close Help

Analyze | Follow TCP stream

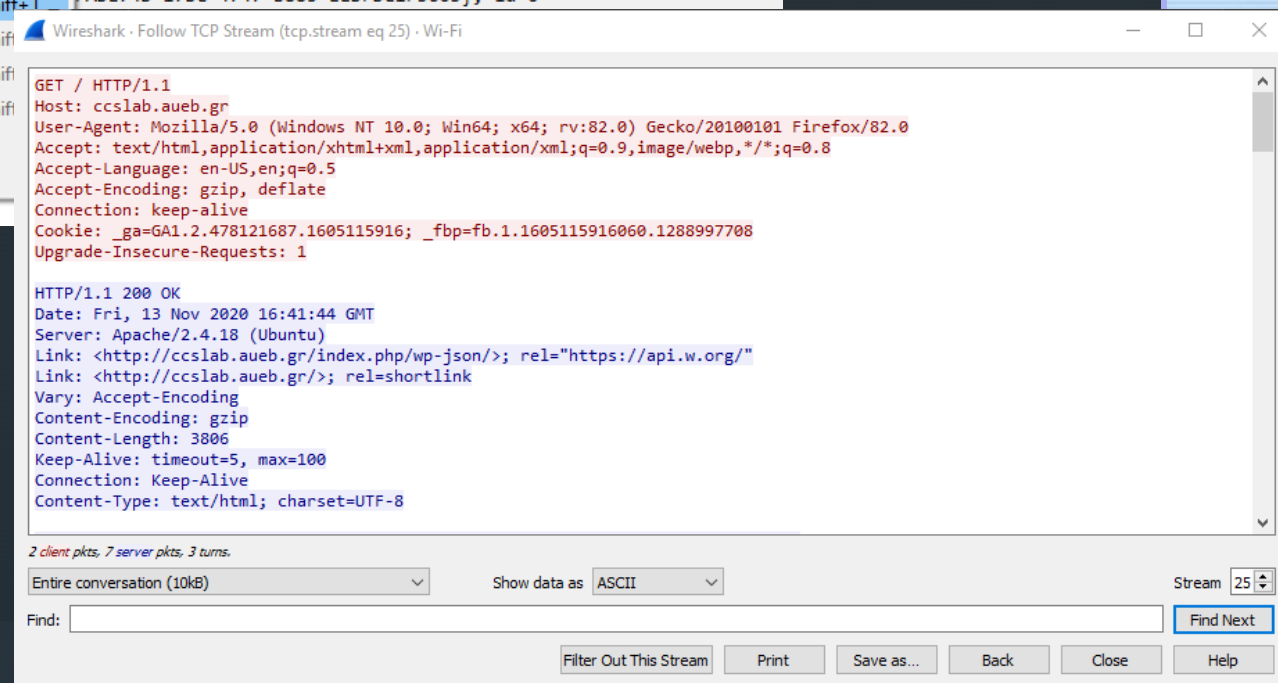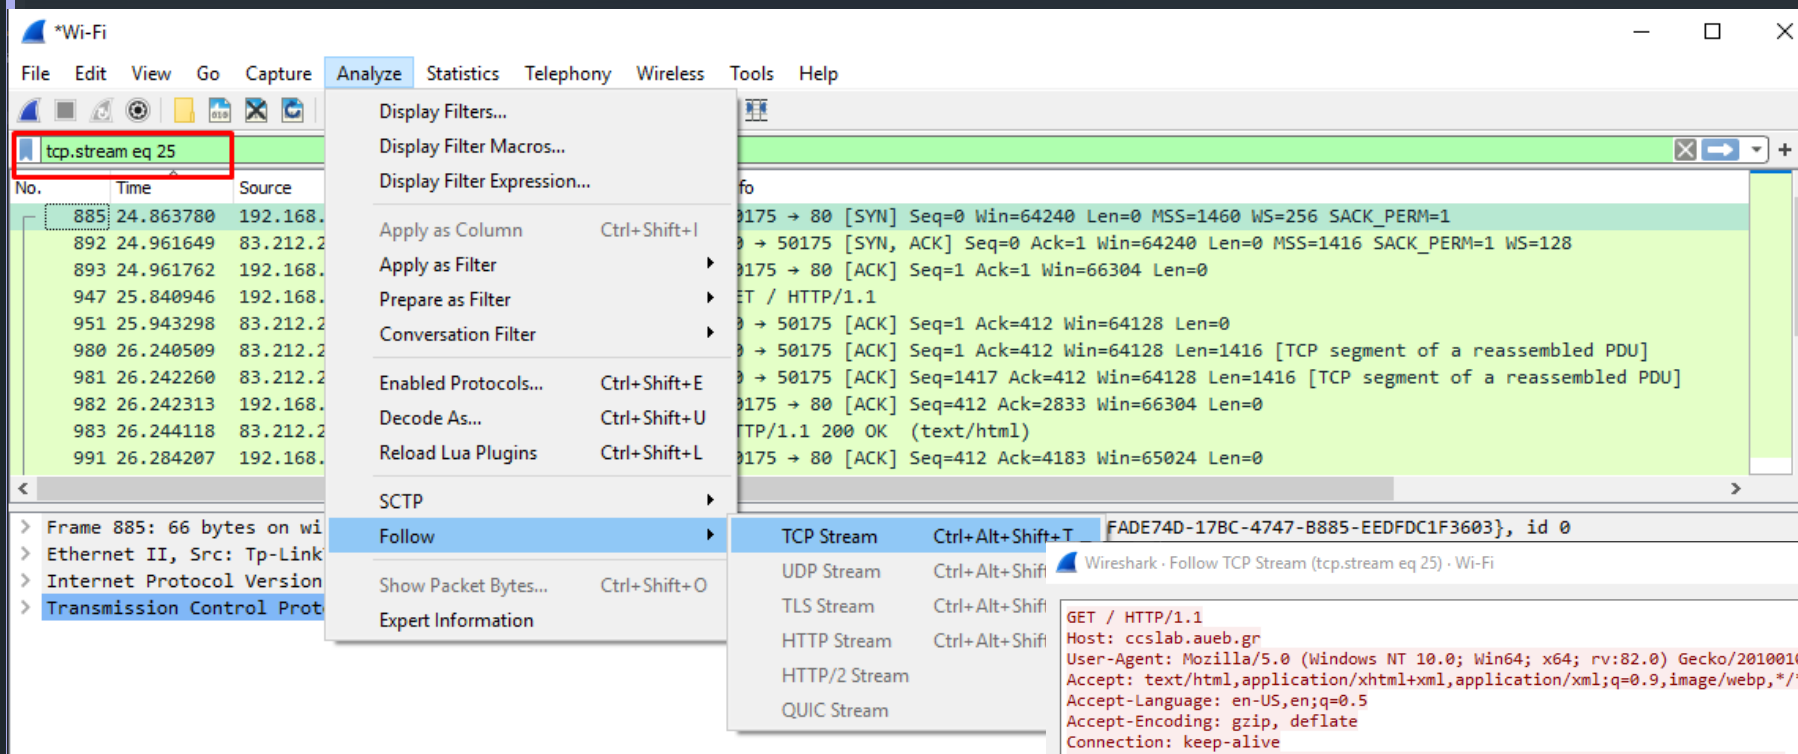

Statistics | Protocol Hierarchy

The image shows the Wireshark network protocol analyzer interface. The main window displays a packet list with columns for No., Time, Source, and Destination. A menu is open over the 'Statistics' menu item, showing options like 'Capture File Properties', 'Resolved Addresses', 'Protocol Hierarchy', 'Conversations', 'Endpoints', 'Packet Lengths', 'I/O Graphs', 'Service Response Time', and 'DHCP (BOOTP) Statistics'. The 'Protocol Hierarchy' option is selected, opening a sub-window titled 'Wireshark - Protocol Hierarchy Statistics - Wi-Fi'.

The 'Protocol Hierarchy Statistics' window displays a table with the following data:

Protocol	Percent Packets	Packets	Percent Bytes	Bytes	Bits/s	End Packets	End Bytes	End Bits/s
Frame	100.0	88	100.0	17338	6974	0	0	0
Ethernet	100.0	88	7.1	1232	495	0	0	0
Internet Protocol Version 4	97.7	86	9.9	1720	691	0	0	0
User Datagram Protocol	44.3	39	1.8	312	125	0	0	0
Simple Service Discovery Protocol	4.5	4	6.3	1096	440	4	1096	440
QUIC IETF	20.5	18	46.7	8091	3254	18	8091	3254
Data	19.3	17	12.7	2205	887	17	2205	887
Transmission Control Protocol	53.4	47	15.1	2626	1056	23	485	195
Transport Layer Security	26.1	23	9.6	1660	667	23	1660	667
Data	1.1	1	0.0	1	0	1	1	0
Address Resolution Protocol	2.3	2	0.3	56	22	2	56	22

At the bottom of the window, it says 'No display filter.' and there are buttons for 'Close', 'Copy', and 'Help'.

Statistics | Conversations

The image shows the Wireshark interface with the Statistics | Conversations pane open. The main pane displays a list of conversations for the selected filter. The 'Name resolution' checkbox is checked, and the 'IPv4' tab is selected.

Wireshark - Conversations - Wi-Fi

Ethernet · 6 **IPv4 · 13** IPv6 TCP · 9 UDP · 11

Address A	Address B	Packets	Bytes	Packets A → B	Bytes A → B	Packets B → A	Bytes B → A	Rel Start	Duration	Bits/s A → B	Bits/s B → A
AskeyCom_44:3a:91	Tp-LinkT_19:1c:51	65	13k	36	7461	29	5610	0.000000	19.8328	3009	2262
IPv4mcast_07	SamsungE_4a:7e:0e	10	2380	0	0	10	2380	0.226345	18.0226	0	1056
IPv4mcast_7f:ff:fa	IntelCor_78:1a:45	4	1264	0	0	4	1264	2.992374	15.0523	0	671
IPv4mcast_7f:ff:fa	SamsungE_4a:7e:0e	3	231	0	0	3	231	4.936107	11.9804	0	154
IntelCor_78:1a:45	Broadcast	2	84	2	84	0	0	6.777587	10.0363	66	0
SamsungE_4a:7e:0e	Broadcast	4	308	4	308	0	0	1.866211	18.0199	136	0

☒ Name resolution ☐ Limit to display filter ☐ Absolute start time

Wireshark - Conversations - Wi-Fi

Ethernet · 6 **IPv4 · 13** IPv6 TCP · 9 UDP · 11

Address A	Address B	Packets	Bytes	Packets A → B	Bytes A → B	Packets B → A	Bytes B → A	Rel Start	Duration	Bits/s A → B	Bits/s B → A
51.140.157.153	192.168.1.2	1	54	1	54	0	0	14.551605	0.0000	—	—
52.111.231.3	192.168.1.2	2	143	1	54	1	89	9.443996	0.1093	3951	6512
52.114.74.225	192.168.1.2	3	267	1	101	2	166	13.312551	0.1174	6884	11k
52.114.104.45	192.168.1.2	3	688	2	447	1	241	0.399763	0.1545	23k	12k
74.125.133.188	192.168.1.2	2	121	1	66	1	55	16.822907	0.0779	6778	5648
92.123.90.207	192.168.1.2	33	2789	19	1961	14	828	0.240615	18.2004	861	363

☐ Name resolution ☐ Limit to display filter ☐ Absolute start time

Conversation Types ▼

Copy Follow Stream... Graph... Close Help

Statistics | Endpoints

Wireshark - Statistics

- Capture File Properties
- Resolved Addresses
- Protocol Hierarchy
- Conversations
- Endpoints**
- Packet Lengths
- I/O Graphs
- Service Response Time
- DHCP (BOOTP) Statistics
- ONC-RPC Programs

Wireshark - Endpoints - Wi-Fi

Ethernet · 7 **IPv4 · 15** IPv6 TCP · 16 UDP · 17

Address	Packets	Bytes	Tx Packets	Tx Bytes	Rx Packets	Rx Bytes	Country	City	AS Number	AS Organization
51.140.157.153	1	54	1	54	0	0	—	—	—	—
52.111.231.3	2	143	1	54	1	89	—	—	—	—
52.114.74.225	3	267	1	101	2	166	—	—	—	—
52.114.104.45	3	688	2	447	1	241	—	—	—	—
74.125.133.188	2	121	1	66	1	55	—	—	—	—
92.123.90.207	33	2789	19	1961	14	828	—	—	—	—
104.146.202.25	3	162	1	54	2	108	—	—	—	—
172.217.17.163	9	4100	5	2079	4	2021	—	—	—	—
172.217.169.131	9	4747	5	2645	4	2102	—	—	—	—
192.168.1.2	65	13k	29	5610	36	7461	—	—	—	—
192.168.1.3	17	2919	17	2919	0	0	—	—	—	—
192.168.1.4	4	1264	4	1264	0	0	—	—	—	—
192.168.1.255	4	308	0	0	4	308	—	—	—	—
224.0.0.7	10	2380	0	0	10	2380	—	—	—	—
239.255.255.250	7	1495	0	0	7	1495	—	—	—	—

☐ Name resolution ☐ Limit to display filter Endpoint Types ▼

Copy Map Close Help

Wireshark - Endpoints - Wi-Fi

Ethernet · 7 **IPv4 · 15** IPv6 TCP · 16 UDP · 17

Address	Packets	Bytes	Tx Packets	Tx Bytes	Rx Packets	Rx Bytes
00:21:63:44:3a:91	65	13k	36	7461	29	5610
01:00:5e:00:00:07	10	2380	0	0	10	2380
01:00:5e:7f:ff:fa	7	1495	0	0	7	1495
34:de:1a:78:1a:45	6	1348	6	1348	0	0
98:de:d0:19:1c:51	65	13k	29	5610	36	7461
fc:03:9f:4a:7e:0e	17	2919	17	2919	0	0
ff:ff:ff:ff:ff:ff	6	392	0	0	6	392

☐ Name resolution ☐ Limit to display filter Endpoint Types ▼

Copy Map Close Help

Statistics | IPv4 Statistics | Destinations & Ports

Wireshark · Destinations and Ports · Wi-Fi

Topic / Item	Count	Average	Min Val	Max Val	Rate (ms)	Percent	Burst Rate	Burst Start
▼ Destinations and Ports	86				0.0043	100%	0.0800	3.995
▼ 92.123.90.207	14				0.0007	16.28%	0.0300	3.996
▼ TCP	14				0.0007	100.00%	0.0300	3.996
443	14				0.0007	100.00%	0.0300	3.996
▼ 74.125.133.188	1				0.0001	1.16%	0.0100	16.823
▼ TCP	1				0.0001	100.00%	0.0100	16.823
5228	1				0.0001	100.00%	0.0100	16.823
▼ 52.114.74.225	2				0.0001	2.33%	0.0100	13.313
▼ TCP	2				0.0001	100.00%	0.0100	13.313
443	2				0.0001	100.00%	0.0100	13.313
▼ 52.114.104.45	1				0.0001	1.16%	0.0100	0.419
▼ TCP	1				0.0001	100.00%	0.0100	0.419
443	1				0.0001	100.00%	0.0100	0.419
▼ 52.111.231.3	1				0.0001	1.16%	0.0100	9.444
▼ TCP	1				0.0001	100.00%	0.0100	9.444
443	1				0.0001	100.00%	0.0100	9.444
▼ 239.255.255.250	7				0.0004	8.14%	0.0100	2.992
▼ UDP	7				0.0004	100.00%	0.0100	2.992
1900	4				0.0002	57.14%	0.0100	2.992
15600	3				0.0002	42.86%	0.0100	4.936
▼ 224.0.0.7	10				0.0005	11.63%	0.0100	0.226

Display filter:

Apply

Copy Save as... Close

Wireshark | Color Coding (while listing packets)

Color in Wireshark	Packet Type
Light purple	TCP
Light blue	UDP
Black	Packets with errors
Light green	HTTP traffic
Light yellow	Windows-specific traffic, including Server Message Blocks (SMB) and NetBIOS
Dark yellow	Routing
Dark gray	TCP SYN, FIN and ACK traffic